



XStream Time Capsule

The X-Stream Time Capsule system works with XStream mini cameras to produce and record slow motion image streams. With 8TB of on-board storage, the system delivers concurrent LIVE and SLOW MOTION 12Gbit SDI outputs with simultaneous image transfer to a PC via 10Gbit Ethernet.

Features

- Continuous Recording
- Advanced Paint Control
- Broadcast/Cine Ready
- V-Lock Battery Compatible

MECHANICAL

| | |
|------------|----------------------------------|
| Weight | 1.88 kg or 4.14 lbs |
| Dimensions | 243mm x 99mm x 127mm (W x H x L) |

OPERATING TEMPERATURE

0+40 °C / 32+104°F

POWER

| | |
|---------------|-----------------------------|
| Input Voltage | 24 VDC |
| Battery: | V-Lock Battery Power Supply |

COMMUNICATION INTERFACE

Ethernet 10G

TRIGGERING AND SYNCHRONIZATION

Sync In, Sync Out, Ready: TTL level compatible, with 5V level signal
Trig In: TTL level compatible, with 5V level signal, active "0"

VIDEO


2x 12G SDI Ports
Reference port for GenLock

CONTROL

LANC port for LANC Controller



XStream Time Capsule

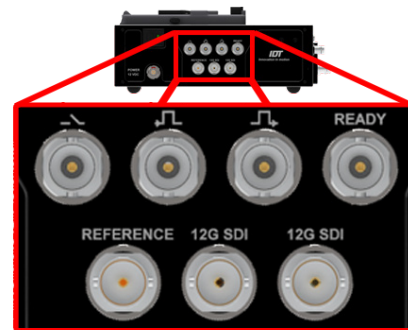

CAMERA SUPPORT

4x USB-C Ports for XStream mini or XStream Stick Series Cameras

CAMERA SUPPORT - MAX FRAME RATES

| | |
|-----------------------|----------|
| XStream Mini XSM-1540 | 4000 FPS |
| XStream Mini XSM-3520 | 2000 FPS |
| XStream Mini XSM-4K | 500 FPS |
| XStream STICK XSS-HD | 1000 FPS |